
RÜBIG
SCHMIEDETECHNIK





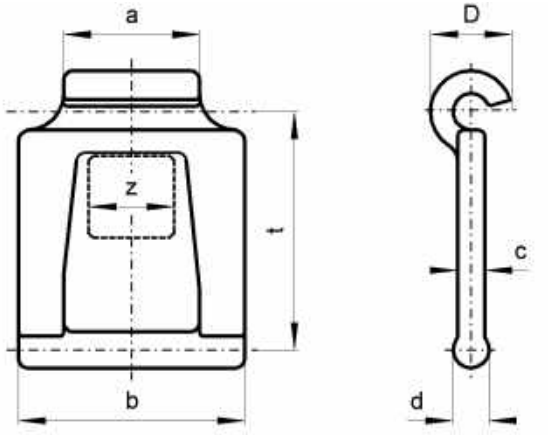

RÜBIG CHAIN SYSTEM „KLASSIK"

- weather-resistant
- low weight
- good weldable
- easy to assemble and disassemble by hand


The detachable chain, developed and forged by RÜBIG, has a particular beneficial fibre- and structural condition which provides, beside it's innovative design, the basis for it's durability and toughness.

pitch „t" version	Order no.	dimensions in [mm]					recommended max. (*) working load	*average breaking load*
		a	b	d	c	D		
29,3 HF	07293100	17,5	30	6	4	15	8 kN	*24 kN*
35 HF	07350100	19,5	32	6	4	15	8 kN	*24 kN*
35 HV	07350200	19,5	32	6	4	15	9 kN	*30 kN*
39 HF	07390100	20,5	36	7	5,5	16,5	11 kN	*36 kN*

Franz RÜBIG & SÖHNE GmbH & Co KG
Mitterhoferstraße 17 | 4600 Wels | Austria | st.office@rubig.com | www.rubig.com

RÜBIG
SCHMIEDETECHNIK



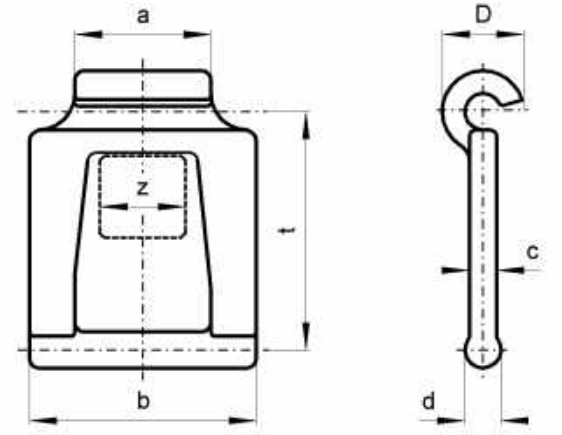


pitch „t" version	Order no.	dimensions in [mm]					recommended max. (*) working load	*average breaking load*
		a	b	d	c	D		
39 HV	07350200	20,5	36	7	5,5	16,5	13 kN	*40 kN*
41,3 HF	07413100	20,5	36	7	5,5	16,5	11 kN	*36 kN*
41,3 HV	07413200	20,5	36	7	5,5	16,5	13 kN	*40 kN*
44 HF	07440100	23	43	8	5	18,5	15 kN	*45 kN*
49 HF	07490100	20,5	36	7	5,5	16,5	11 kN	*36 kN*
49 HV	07490200	20,5	36	7	5,5	16,5	13 kN	*40 kN*
49 INOX	07490300	20,5	36	7	5,5	16,5	8 kN	*24 kN*
49 E	07490400	20,5	36	7	5,5	16,5	13 kN	*40 kN*
57 HF	07570100	20,5	36	7	5,5	16,5	11 kN	*36 kN*
59S HF	07591100	20,5	36	7	5,5	16,5	11 kN	*36 kN*
59S HV	07591200	20,5	36	7	5,5	16,5	13 kN	*40 kN*
59S INOX	07591300	20,5	36	7	5,5	16,5	8 kN	*24 kN*
59 HF	07590100	28	49	7,5	5	19	17 kN	*60 kN*
59 HV	07590200	28	49	7,5	5	19	19 kN	*75 kN*
59 E	07590400	28	49	7,5	5	19	20 kN	*75 kN*
67 HF	07670100	37	62	10	7	25	29 kN	*80 kN*
67 HV	07670200	37	62	10	7	25	33 kN	*100 kN*
67 E	07670400	37	62	10	7	25	35 kN	*100 kN*

Franz RÜBIG & SÖHNE GmbH & Co KG
Mitterhoferstraße 17 | 4600 Wels | Austria | st.office@rubig.com | www.rubig.com

RÜBIG
SCHMIEDETECHNIK



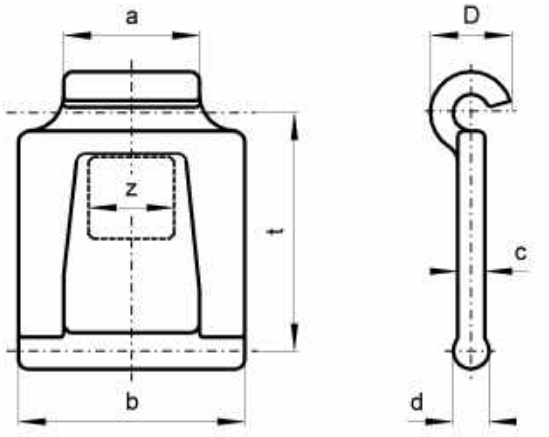

pitch „t“ version	Order no.	dimensions in [mm]					recommended max. (*) working load	*average breaking load*
		a	b	d	c	D		
67 HVB	07670201	37	67	10	7,5	25	33 kN	*100 kN*
67 EB	07670401	37	67	10	7,5	25	33 kN	*100 kN*
78,5 HF	07785100	47	82	13	8	32	48 kN	*125 kN*
78,5 HV	07785200	47	82	13	8	32	55 kN	*170 kN*
78,5 E	07785400	47	82	13	8	32	55 kN	*170 kN*
100 HV	07100200	49	85	14	10	35	64 kN	*230 kN*
100 E	07100400	49	85	14	10	35	64 kN	*230 kN*
125 HV	07125200	50	85	16	11,5	40	80 kN	*280 kN*

versions:	description:	field of application:
HF	high strenght	*standard version, good weldable*
HV	high wear resistant	*for applications in mineral bulk material and / or higher chain speed*
E	alloyed steel	*for special application in industrial plants (such as paper works,….);optionally available in nitrided version; suitable to applications on higher temperatures.*
INOX	stainless steel	*category „V2A“*
*…	valid for "recommended max. working load" up to 10,000 load cycles. At higher demand on the life span, the max. working load has to be reduced accordingly. *(in that case - please, get in contact to us)*	

Franz RÜBIG & SÖHNE GmbH & Co KG
Mitterhoferstraße 17 | 4600 Wels | Austria | st.office@rubig.com | www.rubig.com