


RG0004 GLOVES FR ARC 2 (13-4 HFR-AF)



TECHNICAL PROPERTIES

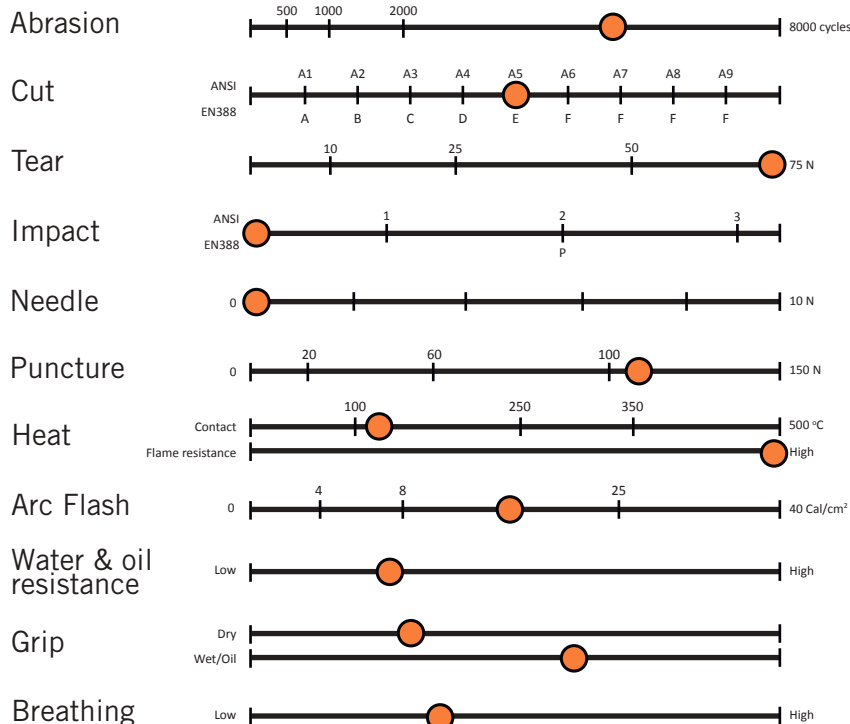

EN388



3X43E

A: ABRASION (1-4)
B: CUT (1-5)
C: TEAR (1-4)
D: PUNCTURE (1-4)
E: ISO CUT (A-F)
P: IMPACT PROTECTION

ISO Cut force (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | > 22 N
F | > 30 N



EN407



41324X

A: BURNING BEHAVIOUR (1-4)
B: CONTACT HEAT (1-4)
C: CONVECTIVE HEAT (1-4)
D: RADIANT HEAT (1-4)
E: SMALL SPLASHES OF MOLTEN METAL (1-4)
F: LARGE QUANTITIES OF MOLTEN METAL (1-4)

ARC FLASH

ASTM F2675, ATPV=

30 Cal/cm² (Palm)

16 Cal/cm² (Back of Hand) 40 Cal/cm² (Print)

ART.NO: 13-4HFR-AF
60 pairs (5 dozen)/Carton

