

RG0003 GLOVES FR ARC 1 (13-4 HFR)




ASTM F2675

Green fabric max 15% 5.8 cal/cm²
Print on back 25% 23 cal/cm²
Black Coating 60% 30 cal/cm²

Suitable for working in Arc Flash environments

TECHNICAL PROPERTIES

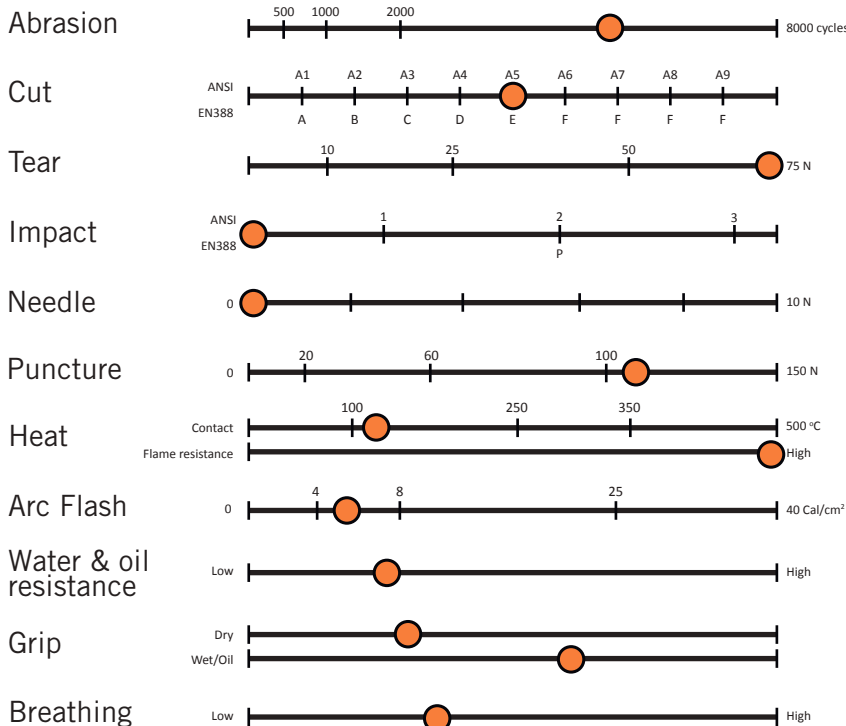

EN388



3X43E

A: ABRASION (1-4)
B: CUT (1-5)
C: TEAR (1-4)
D: PUNCTURE (1-4)
F: ISO CUT (A-F)
P: IMPACT PROTECTION

ISO Cut force (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | ≥ 22 N
F | > 30 N



EN407



41324X

A: BURNING BEHAVIOUR (1-4)
B: CONTACT HEAT (1-4)
C: CONVECTIVE HEAT (1-4)
D: RADIANT HEAT (1-4)
E: SMALL SPLASHES OF MOLTEN METAL (1-4)
F: LARGE QUANTITIES OF MOLTEN METAL (1-4)

ARC FLASH

ASTM F2675, ATPV=

30 Cal/cm² (Palm)

5,8 Cal/cm² (Back of Hand)

23 Cal/cm² (Print)

ART.NO: 13-4HFR
60 pairs (5 dozen)/Carton

CE
CAT II

7	8	9	10	11	12
XS	S	M	L	XL	XXL